


# CAMERA-READY LOGOTYPE FOR TELECOMMUNICATION WIRE AND CABLE PERFORMANCE VERIFICATION MARK

These Marks are registered by Underwriters Laboratories Inc.



The minimum height of the registered trademark symbol ® shall be 3/64 of an inch. When the overall diameter of the UL Performance Verification Mark for telecommunication wire and cable is less than 7/16 of an inch, the trademark symbol may be omitted if it is not legible to the naked eye. Regulatory information adjacent to the Mark will be set in Helvetica Condensed Bold.

## RELATIVE DESIGN & PROPORTIONS FOR TELECOMMUNICATION WIRE AND CABLE PERFORMANCE VERIFICATION MARK

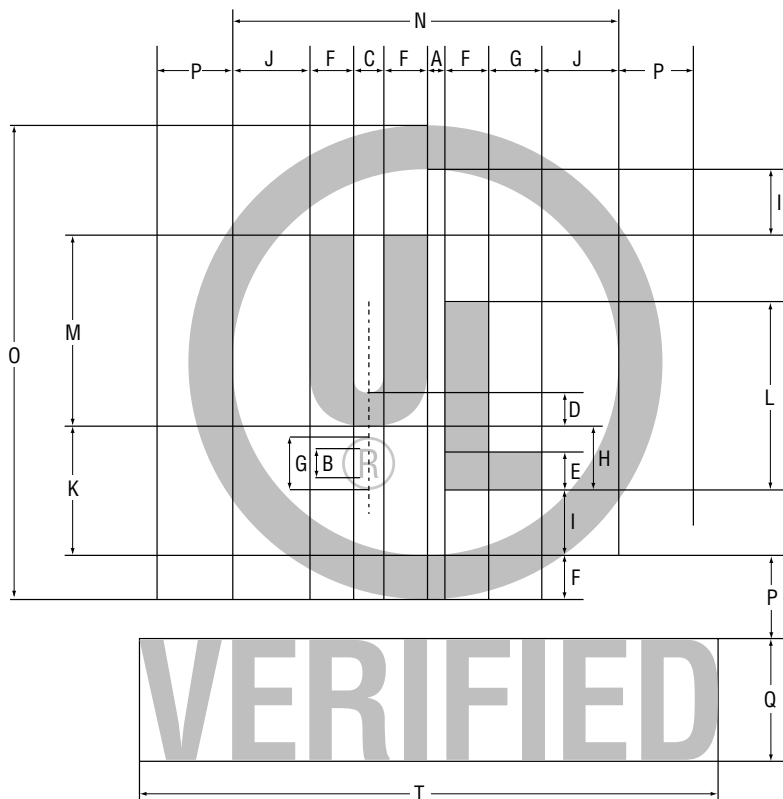

### KEY TO DIMENSIONS

#### UL Performance Verification Mark

A	8 units
B	13 units
C	14 units
D	15 units
E	17 units
F	20 units
G	24 units
H	29 units
I	30 units
J	35 units
K	59 units
L	85 units
M	87 units
N	176 units
O	216 units

#### "Verified"

P	38 units
Q	56 units
T	264 units

